




linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

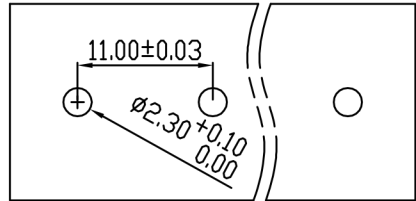

PCB LAYOUT

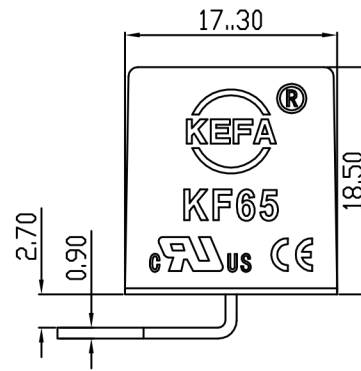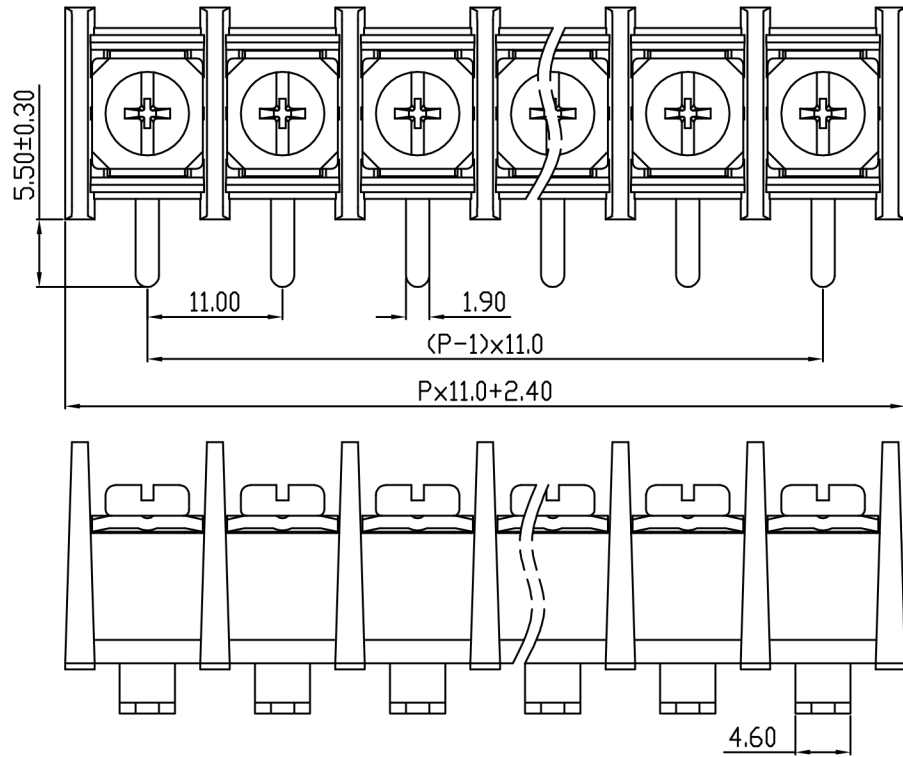

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.12.02

UL/CUL 技术参数 UL/CUL Technical Data					
等级	Use Group	B	C	D	
额定电压	Rated Voltage [V]	600	-	-	
额定电流	Rated Current [A]	30	-	-	
接线范围	Wire Range				
单/多芯线	Solid/Stranded [AWG]	18-10			
IEC 技术参数 IEC Technical Data					
额定电压	Rated Voltage [V]	750			
额定电流	Rated Current [A]	32			
耐电压	Withstanding Voltage	3000V/1Min			
导线截面积	Conductor cross section	4.0			
硬质/柔性导线	Solid/flexible [mm ²]				
材料 Material					
绝缘材料	Insulation Material	PA66			
阻燃等级	Flammability	UL94V-0			
导体材料	Contacting Material	铜合金 Copper alloy			
导体表面镀层	Contactive Coating	镀锡 Tin plated			
一般参数 Other Data					
间距	Pitch [mm]	11.0			
极数	Poles [P]	02-24			
剥线长度	Stripping Length [mm]	-			
螺丝	Screw/扭矩 Torque(Max) [N.m]	M4/1.2			
工作温度	Operating temperatur [°C]	-40~+105			
引针尺寸	Pin Dimensions [mm]	5.5			
PCB板孔径	PCB Hole Diameter [mm]	2.3			

DES.	LQQ	DATE	21.12.02	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	A
CHK.	BY	DATE	21.12.02	慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD								名称 / TITLE KF65R-11.0
APP.	CLF	DATE	21.12.02									