
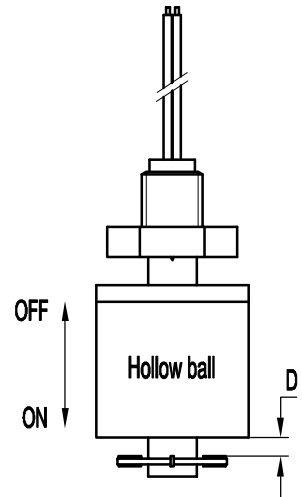


Specification

Customer		Name	Plastic level sensors	Type	MR1041-PP-2A1C
----------	--	------	-----------------------	------	----------------

Movement explanation

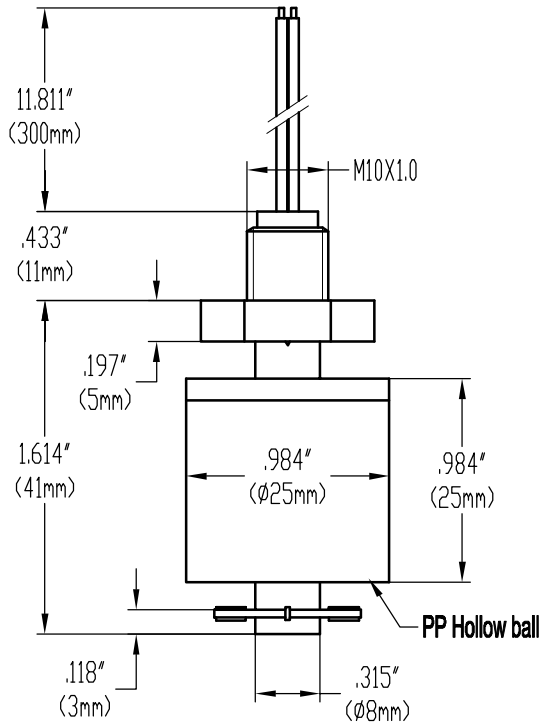

Movement explanation :
 When the float drops to the D position in the position between $D=3\pm 1\text{mm}$, the reed switches will be closed

Material Specification			Electrical Specification			Physics Specification		
Part name	Specification	Quantity						
1.float ball	PP black	1PC	1.contact form	A(N.O.)	1.float pressure			$\leq 0.2\text{MPa}$
2.float body	PP black	1PC	2.contact rating	50W	2.min resistance to vibration value			(11-1000HZ)
3.cap nut	—	—	3.max switching current	DC350/AC300	3.applicable temperature			-10 ~ +85°c
4.o-ring	—	—	4.breakdown voltage	600min				
5.e-ring	PP black	1PC	5.max switching voltage	DC0.7/AC0.5				
6.wire	UL 1007 24# black	300mm	6.max carry current	2.5A				
7.filling	epoxy glue	—	7.contact resistance	100max				
8.terminal	—	—	8.insulation resis tance	10 ⁴ min				
9.housing	—	—	9.get an electric shock life	10 ⁷				
10.reed switch	229	1PC	designed by:	checked by:	drawing by:	drawing date:	scale:	

Ningbo Holleywin Export&Import Trade Co., LTD.

filename:		
drawing no.	edition:	sheet: 1