



Specification

Customer		Name	Plastic level sensors	Type	MR10110-PP-2A3C
----------	--	------	-----------------------	------	-----------------

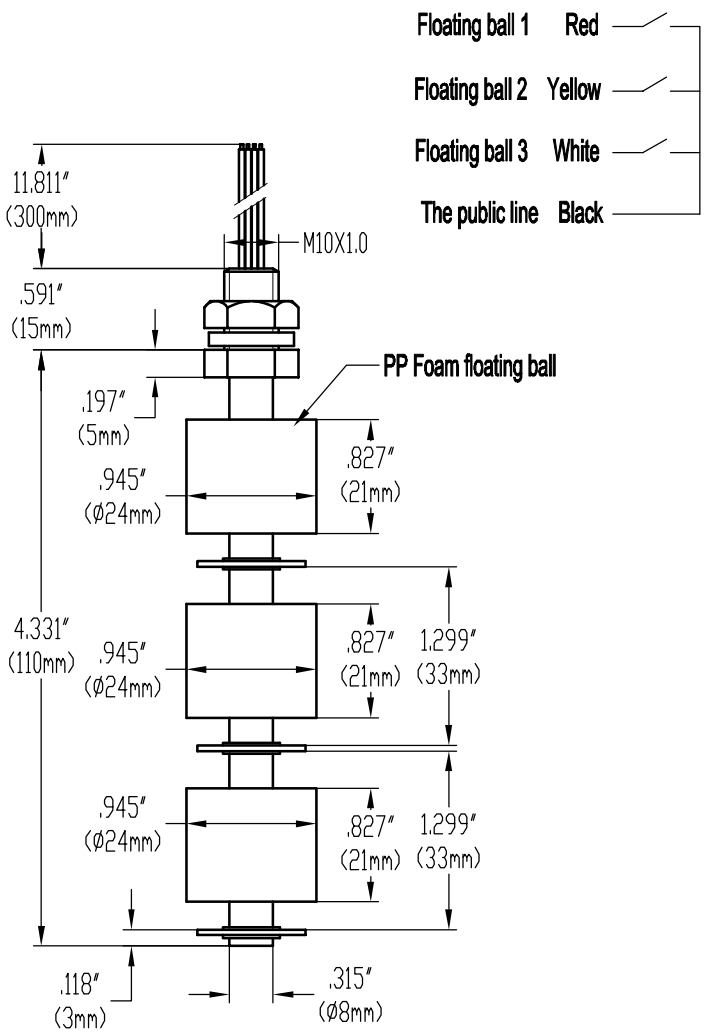

- Floating ball 1 Red
- Floating ball 2 Yellow
- Floating ball 3 White
- The public line Black

Movement explanation

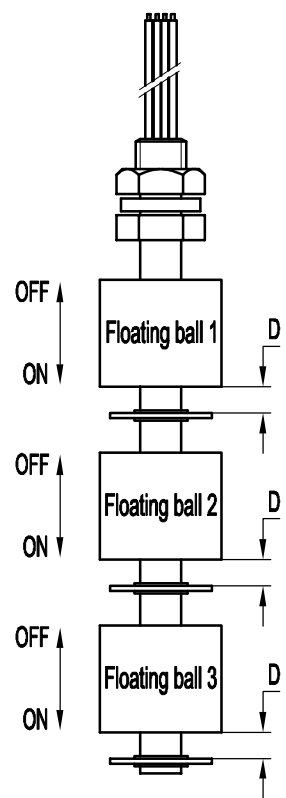

Movement explanation :
When the float drops to the D position in the position between D=3±1mm, the reed switches will be closed

Material Specification			Electrical Specification			Physics Specification		
Part name	Specification	Quantity	1.contact form	A(N.O.)		1.float pressure	≤0.2MPa	
1.float ball	PP	3PCS	2.contact rating	50W		2.min resistance to vibration value	(11-1000HZ)	
2.float body	POM	1PC	3.max switching current	DC350/AC300		3.applicable temperature	-10 ~ +85°c	
3.cap nut	POM	1PC	4.breakdown voltage	600min				
4.o-ring	rubber	1PC	5.max switching voltage	DC0.7/AC0.5				
5.e-ring	POM	3PCS	6.max carry current	2.5A				
6.wire	UL 1007 24# black	300mm	7.contact resistance	100max				
7.filling	epoxy glue	—	8.insulation resis tance	10 ⁴ min				
8.terminal	—	—	9.get an electric shock life	10 ⁷				
9.housing	—	—	designed by:	checked by:	drawing by:	drawing date:	scale:	
10.reed switch	229	3PCS						

Ningbo Holleywin Export&Import Trade Co., LTD.

filename: _____
drawing no. _____ edition: _____ sheet: 1