
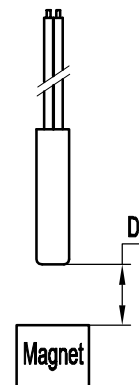


# Specification

Customer		Name	Proximity switch	Type	MR0625
----------	--	------	------------------	------	--------

## Movement explanation

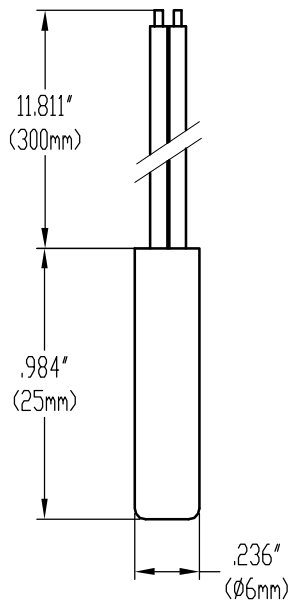

**Movement explanation :**  
When  $D=18\pm 1\text{mm}$ , the reed switches will be closed

Material Specification			Electrical Specification			Physics Specification		
Part name	Specification	Quantity	1.contact form	A(N.O.)		1.min resistance to vibration value (11-1000HZ)		
1.Magnet	—	Optional	2.contact rating	10W		2.applicable temperature -10 ~ +85°c		
2.float body	Copper	1PC	3.max switching current	DC100/AC100				
3.cap nut	—	—	4.breakdown voltage	150min				
4.o-ring	—	—	5.max switching voltage	DC0.5				
5.e-ring	—	—	6.max carry current	1.0A				
6.wire	UL 1007 24# black	300mm	7.contact resistance	100max				
7.filling	epoxy glue	—	8.insulation resistance	10 <sup>9</sup> min				
8.terminal	—	—	9.get an electric shock life	10 <sup>7</sup>				
9.housing	—	—	designed by:	checked by:	drawing by:	drawing date:	scale:	
10.reed switch	324	1PC						

**Ningbo Holleywin Export&Import Trade Co., LTD.**

filename:		
drawing no.	edition:	sheet: 1