

300V 15A 28-12AWG 2.5mm<sup>2</sup>

Poles: 2-12P

Pitch: 7.5mm(295")/7.62mm(.300")

### Materials


Housing: PA66(UL 94V-0)

Clamp: Phosphor Bronze,Nickel Plated.

Wire Cage: Brass(Nickel Plated)

Screw: M3.0,Steel(A3),Zinc Plated.

Torque: 0.5N.m

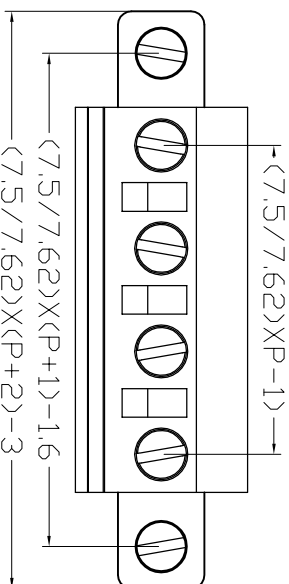

序号/Revmo. 更改记录/Revision note 签名/Signature 日期/Date

设计/Designed by 绘图/Drawing by 审核/Checked by 批准/Approved by 未注公差/General Tolerance

图名/Title 文件编号/File No. X: ±0.2 X: ±2

XY2 500F-PS .X ±0.1 .X' ±1

XY2 500F-QS .XX ±0.05 .XX' ±0.5

.XXX ±0.01

备注/Remark 单位/Units: mm



XINLANYA ELECTRONIC CO., LTD

新莱亚电子