


300V 15A 28-12AWG 2.5mm²
 Poles: 2-12P
 Pitch: 7.5mm(.295")/7.62mm(.300")

Materials

Housing: PA66(UL 94V-0)
 Clamp: Phosphor Bronze,Nickel Plated.
 Wire Cage: Brass(Nickel Plated)
 Screw: M3.0,Steel(A3),Zinc Plated.
 Torque: 0.5N.m

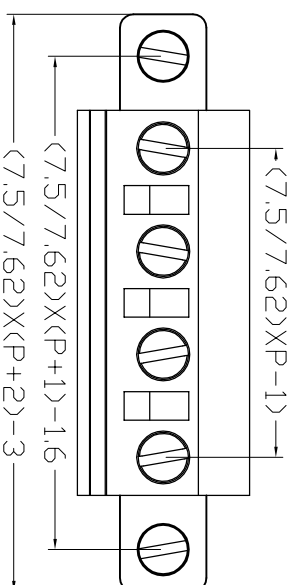

?? /RevNo: ??? /Revision note: ?? /signature: ?? /Date:

设计/Designed by: 绘图/Drawn by: 审核/Checked by: 批准/Approved by: 未注公差/General Tolerance

图名/Title	XY2500F-PRS	文件编号/FileName	XY2500F-QRS	X ± 0.2	X' ± 0.2
				X ± 0.1	X' ± 1
				XX ± 0.05	XX' ± 0.5
				XXX ± 0.01	

新莱亚电子
 XINLAIYA ELECTRONIC CO.,LTD

备注/Remark: 单位/Units: mm