



300V 15A
 Poles: 2-24P
 Pitch: 7.5mm(.295"), 7.62mm(.300")

Materials

Housing: PA66(UL 94V-0)
 Solder Pin: Brass, Tin Plated.
 Nut: M2.5, Brass

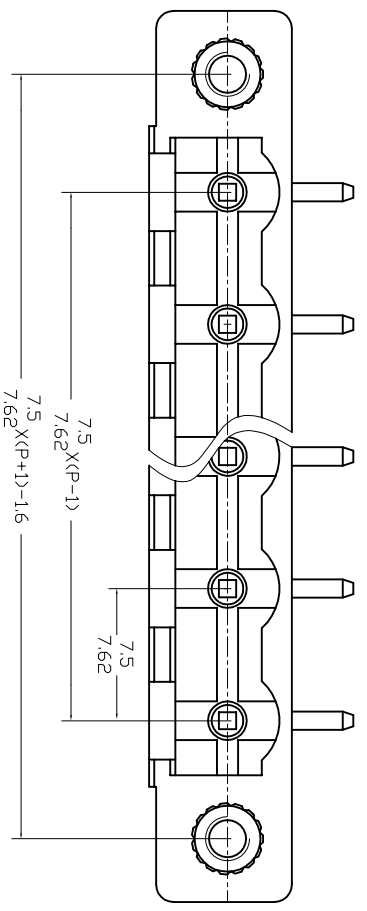

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				X. ±0.2	X. ° ±2°
				.X ±0.1	.X ° ±1°
				.XX ±0.05	.XX ° ±0.5°
				.XXX ±0.01	
 <p>新莱亚电子 XINLAIYA ELECTRONIC CO., LTD</p>				图名/File name	文件编号/File No.
XY2500R-PS XY2500R-QS				页序/Sheet	
备注/Remark				单位/Units:	mm