


300V 52A  
 Poles: 2P-8P  
 Pitch: 10.16 (.400")

**Materials**  
 Housing: PA66 (UL 94V-0)  
 Contact: Copper alloy, Sn plated

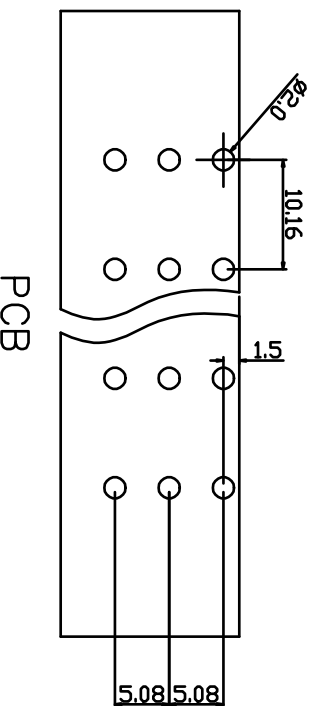

序号/Serial No. 更改记录/Revision note 签名/Signature 日期/Date

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	备注/Remarks
图名/File name	文件编号/File No.			
XY2500SVM-10.16	页序/Sheet			
<b>公差/General Tolerance</b> x. ±0.2 x." ±2° .x ±0.1 .x" ±1° .xx ±0.05 .xx" ±0.5° .xxx ±0.01		<b>单位/Unit to:</b> mm		