


300V 15A 28-12AWG 2.5mm²
 Poles: 2-12P
 Pitch: 7.5mm(.295")/7.62mm(.300")

Materials

Housing: PA66(UL 94V-0)
 Clamp: Phosphor Bronze,Nickel Plated.
 Wire Cage: Brass(Nickel Plated)
 Screw: M3.0,Steel(A3),Zinc Plated.
 Torque: 0.5N.m

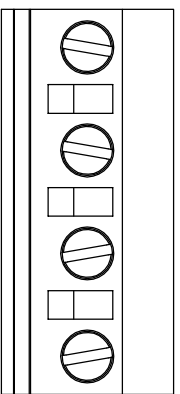

序号/Rev.No. 更改记录/Revision note 签名/Signature 日期/Date

设计/Designed by 绘图/Drawing by 审核/checked by 批准/Approved by 未注公差/General Tolerance

图名/Title 文件编号/File No.

XY2 500F-P
 XY2 500F-Q

页序/Sheet

备注/Remark

X: ±0.2 X': ±2"
 .X ±0.1 .X' ±1"
 .XX ±0.05 .XX' ±0.5"
 .XXX ±0.01
 单位/Units: mm



新莱亚电子
 XINLADYA ELECTRONIC CO., LTD