


Poles: 3P, 5P
Pitch: 3.5mm (.138")
Voltage Rating: 300V
Current Rating: 8A
Housing: PA66 (UL 94V-0)
Solder Pin: Brass, Nickel Plated
Screw: M3.0, Steel (A3), Zinc Plated

设计/Designed by: 绘图/Drawing by: 审核/Checked by: 批准/Approved by:

图名/File name: 文件编号/File No.:

XTDB15-3.5R 页序/Sheet:

备注/Remark: 单位/Units: MM

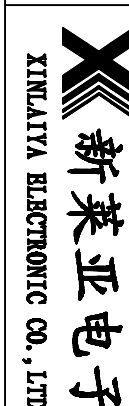

公差 General Tolerance

X. ±0.3	X.° ±2°
.X ±0.2	.X° ±1°
.XX ±0.1	.XX° ±0.5°
.XXX ±0.05	