


250V 4A
 Poles: 2P/3P/4P/5P/6P/7P/8P/11P
 Pitch: 5.08mm (.200"), 7.62mm (.300")
Materials
 Housing: PP0
 Clamp: Phosphor Bronze, Tin Plated
 Ambient temperature: -40°C ~ +105°C

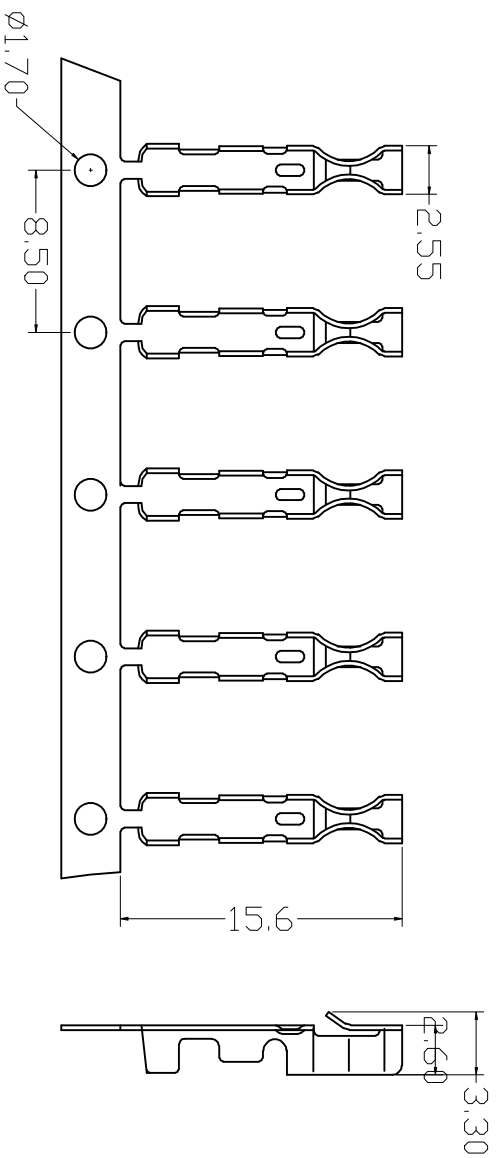

序号/revision, 更改记录/revision record, 签名/signature, 日期/date

设计/modified by, 绘图/drawing by, 审核/checked by, 批准/approved by, 公差/General Tolerance

图名/Title, 零件编号/Part No., .x ±0.2, .x ±0.1, .xx ±0.05, .xxx ±0.01

XY258F 产品图, 页序/Sheet, .xxx ±0.01

单位/unit: mm, 新莱亚电子 XINLIYA ELECTRONIC CO., LTD