


2P

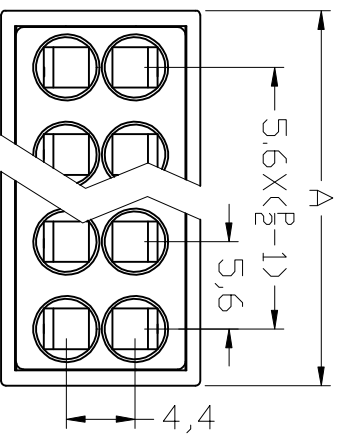

4-8P

Poles	2P	4P	6P	8P
A	9.2	13.1	18.6	24.1

600V 20A 22-14AWG 2.5mm²
 Poles: 2P, 4P, 6P, 8P
 Pitch: 5.6mm (.220")

Materials

Housing: PA66 (UL 94V-0)

Solder Pin: Brass, Tin Plated

Clamping: Stainless steel

序号/revno: 更改记录/revision record 签名/signature 日期/date

设计/modified by	绘图/drawing by	审核/checked by	批准/approved by	公差/General Tolerance
				x. ±0.2 x. ±2°
				.x ±0.1 .x° ±1°
				.xx ±0.05 .xx° ±0.5°
				.xxx ±0.01
新莱亚电子 XINLAIYA ELECTRONIC CO., LTD	图名/title	文件编号/file no.	页序/Sheet	单位/units: 张数
	XY608			
	备注/Remark			