


300V 10A 22-14AWG 1.5mm<sup>2</sup>  
 Poles: (2-24P)  
 Pitch: 7.5mm (.295")

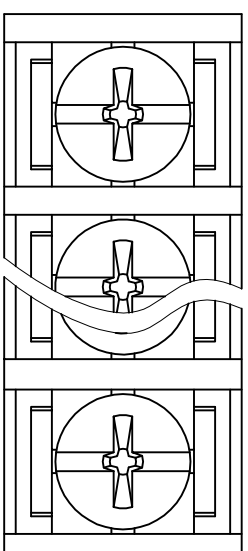

### Materials

Housing: PA66 (UL 94V-0)  
 Solder Pin: Brass, Tin Plated.  
 Screw: M3, Steel, Ni-Plated.

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	备注/General Tolerance
				X. ° ±2° .X ±0.1 .X° ±1° .XX ±0.05 .XX° ±0.5° .XXX ±0.01



新莱亚电子  
 XINLAYA ELECTRONIC CO., LTD

序号/Revno.	更改记录/Revision note	签名/signature	日期/date	图名/File name	文件编号/File No.	页序/Sheet	单位/Units: mm
				XY875A 产品图			
				备注/Remark			