


300V 15A 22-14AWG 2.5mm<sup>2</sup>  
 Poles: (2,3-24P)  
 Pitch: 7.62mm(.300")

### Materials

Housing: PA66(UL 94V-0)  
 Solder Pin: Brass, Tin Plated  
 Screw: M3, Steel, Nickel Plated

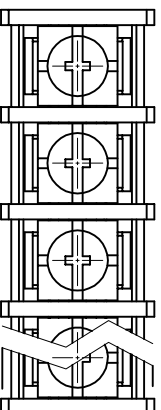

序号/Rev.No. 更改记录/Revision note 签名/Signature 日期/Date

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				X: ±0.2 X: ±0.1 .XX ±0.05 .XXX ±0.01
		图名/Title	文件编号/File No.	X: ±2° X: ±1° .XX ±1° .XXX ±0.5°
XINYLIA ELECTRONIC CO., LTD		XV828BK 产品图	页序/Sheet	单位/Units: mm
备注/Remark				