

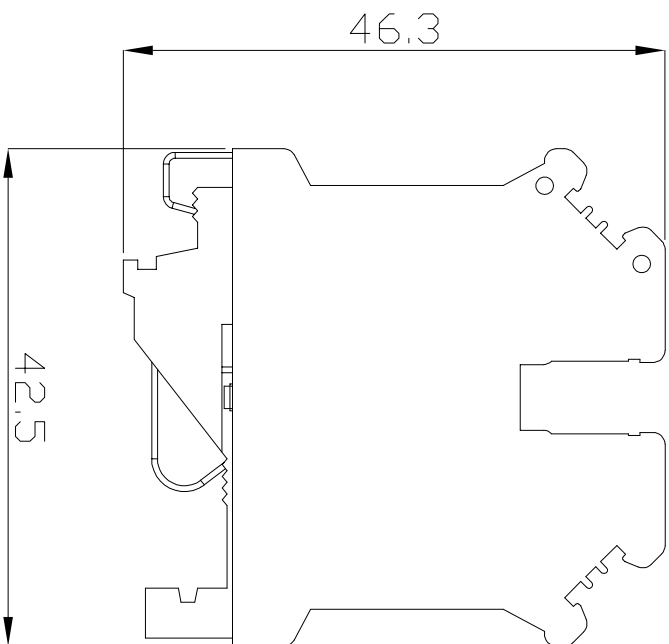


24-12AWG 0.2-2.5mm²
 Poles: 1P-XXP
 Depth/Width:5.2/42.5mm
 Height:47/54.5/52mm
 Rated torque Screws:M3/0.5N.m
 Strip length:8mm
 Materials
 Housing: PA66 (UL 94V-0)
 Zack Strip:ZB 5

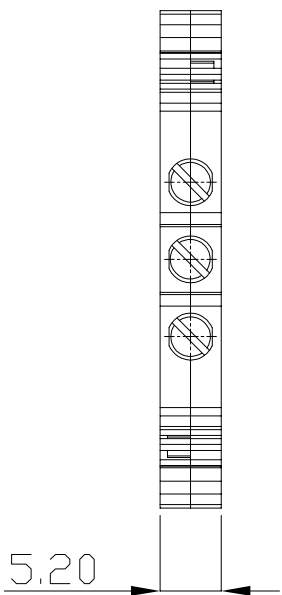

序号/Rev.No.	更改记录/Revision note	签名/Signature	日期/Date																
设计/Designed by		绘图/Drawing by	审核/Checked by																
图名/Title		文件编号/File No.	批准/Approved by																
XYUSLKG3		页序/Sheet	未注公差 General Tolerance																
备注/Remark		单位/units: mm	<table border="1"> <tr> <td>x</td> <td>±0.2</td> <td>x°</td> <td>±2°</td> </tr> <tr> <td>.x</td> <td>±0.1</td> <td>.x°</td> <td>±1°</td> </tr> <tr> <td>.xx</td> <td>±0.05</td> <td>.xx°</td> <td>±0.5°</td> </tr> <tr> <td>.xxx</td> <td>±0.01</td> <td></td> <td></td> </tr> </table>	x	±0.2	x°	±2°	.x	±0.1	.x°	±1°	.xx	±0.05	.xx°	±0.5°	.xxx	±0.01		
x	±0.2	x°	±2°																
.x	±0.1	.x°	±1°																
.xx	±0.05	.xx°	±0.5°																
.xxx	±0.01																		

新莱亚电子
 XINYLAIA ELECTRONIC CO., LTD