

**HDB15M**


**NOTE:**

- 1. Electrical test:  
 (1). 100% open short & miss wire test;  
 (2). Insulation resistance: 10 MEGOHMS Min;  
 (3). Plug contactor resistance: 5 OHMSm Max;
- 2. RoHS compliant.

**MATERIAL LIST:**

⑩	LENGTH		
⑨	FERRITE	DERRITE CORE WITH PVC MOLD,COLOR:GREY	1
⑧	PRINTING	2919 VW-1 80°C 30V LOW VOLTAGE COMPUTER CABLE	
⑦	CABLE	(7/0.12BC+FE)+14/0.109C+PVC)X5 COAXIAL+PVC OD-8.5mm	1
⑥	SCREW	NICKEL PLATED WITH PVC MOLD,COLOR:GREY	2
⑤	MOLD HOOD	BNC*5 MALE:PVC ,COLOR:GREY	5
④	MOLD HOOD	HDB15 MALE:PVC ,COLOR:GREY	1
③	MOLD HOOD	HDB15 MALE:LD-PE	1
②	CONNECTOR	HDB15RJ45 MALE:SOULDER TYPE:GOLD PLATED PIN:NICKEL PLATED SHELL	1
①	CONNECTOR	BNC*5 MALE:SOULDER TYPE:GOLD PLATED PIN:NICKEL PLATED SHELL	5
No.	PART NAME	DESCRIPTION	QTY

**PIN OUT**

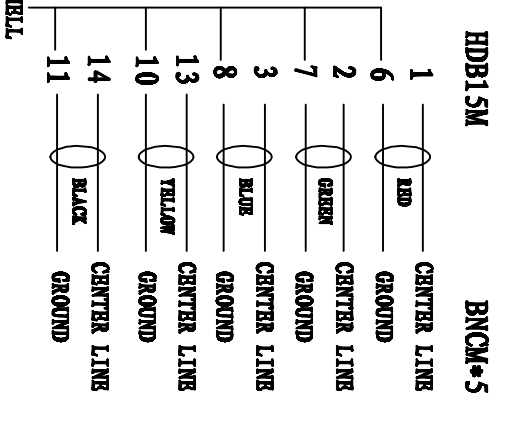

设计/Designed by	绘图/Creating by	审核/Checked by	数量/Approved by	备注/Notes
 新莱亚电子科技 XINYA ELECTRONIC CO.,LTD		图号/NO	文件编号/FILE NO	数量/Quantity
		HDB15RJ45-0*5BNC连接器		4.02
		备注/Remark	图号/NO	4.01
			XTC88	4.01
				4.01