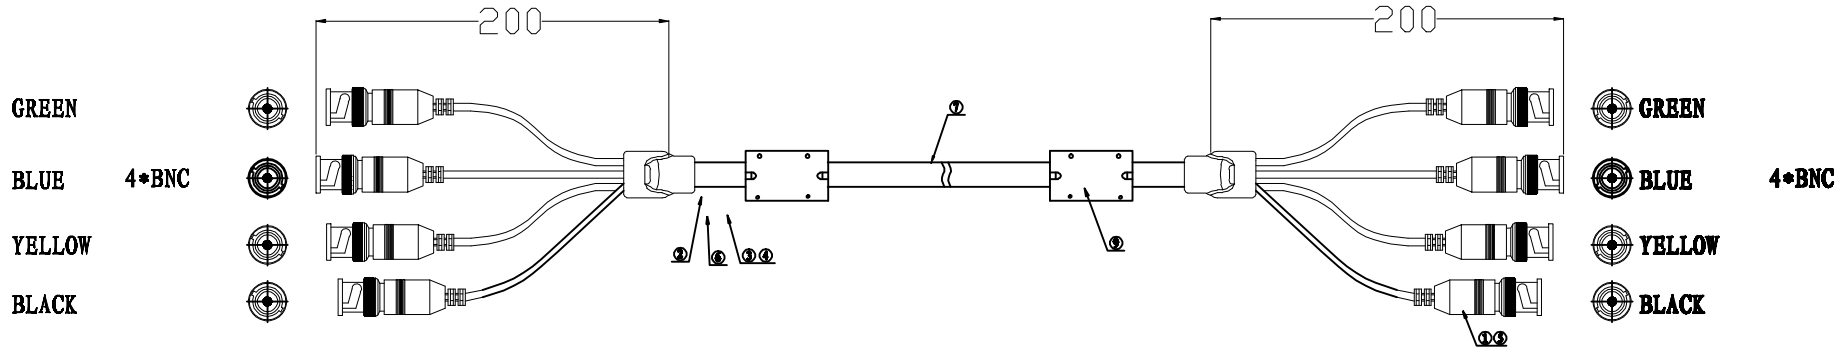

NOTE:

1.Electrical test:
   (1).100% open short & miss wire test;
   (2).Insulation resistance:10 MEGOHMS Min;
   (3).Plug contactor resistance:5 OHMSm Max;

2.RoHS compliant.

PIN OUT

BNC		BNC
1 CENTER LINE	RED	CENTER LINE
2 CENTER LINE	GREEN	CENTER LINE
3 CENTER LINE	BLUE	CENTER LINE
4 CENTER LINE	BLACK	CENTER LINE
SHELL		SHELL

MATERIAL LIST:

No.	PART NAME	DESCRIPTION	QTY
⑦	LENGTH		1
⑥	FERRITE	DERRITE CORE WITH PVC MOLD,COLOR:GREY	1
⑤	PRINTING	2919 VW-1 80℃ 30V LOW VOLTAGE COMPUTER CABLE	1
④	CABLE	(7/0.12BC+FPE+14/0.10BC+PVC)X4 COAX+AL+PVC OD=8.0mm	1
③	MOLD HOOD	BNC*4 MALE:PVC ,COLOR:GREY	2
②	CONNECTOR	BNC*4 MALE,SOLDER TYPE,GOLD PLATED PIN,NICKEL PLATED SHELL	4
①	CONNECTOR	BNC*4 MALE,SOLDER TYPE,GOLD PLATED PIN,NICKEL PLATED SHELL	4

设计 /Designed by	绘图 /Drawing by	审核 /Checked by	批准 /Approved by
新莱亚电子科技 XINYA ELECTRONIC CO.,LTD		图名 /Title: 4*BNC-4*BNC连接线	文件编号 /File No.:
			页序 /Sheet
		备注 /Remark: XYC089	

未注公差 General Tolerance

X	±0.2	X°	±2°
.X	±0.1	.X°	±1°
.XX	±0.05	.XX°	±0.5°
.XXX	±0.01		

单位 /Units: mm